

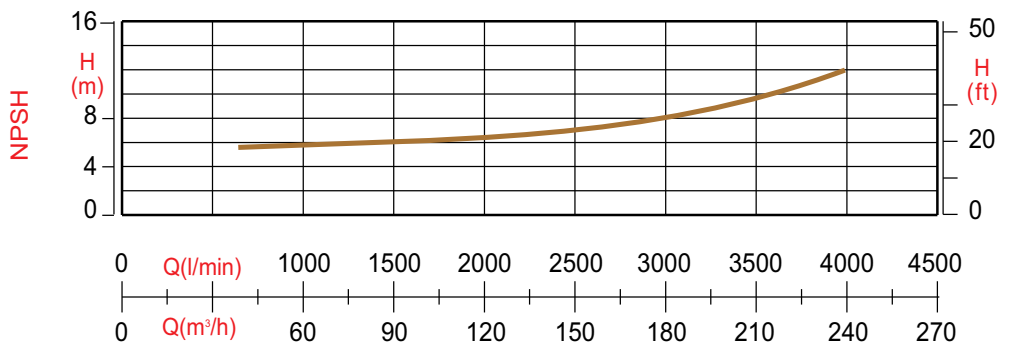


Curve caratteristiche 2 poli/50Hz

Performance curves 2 poles/50Hz

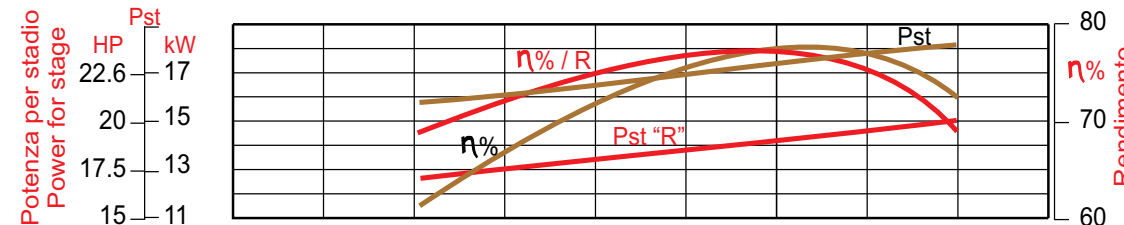


S1270

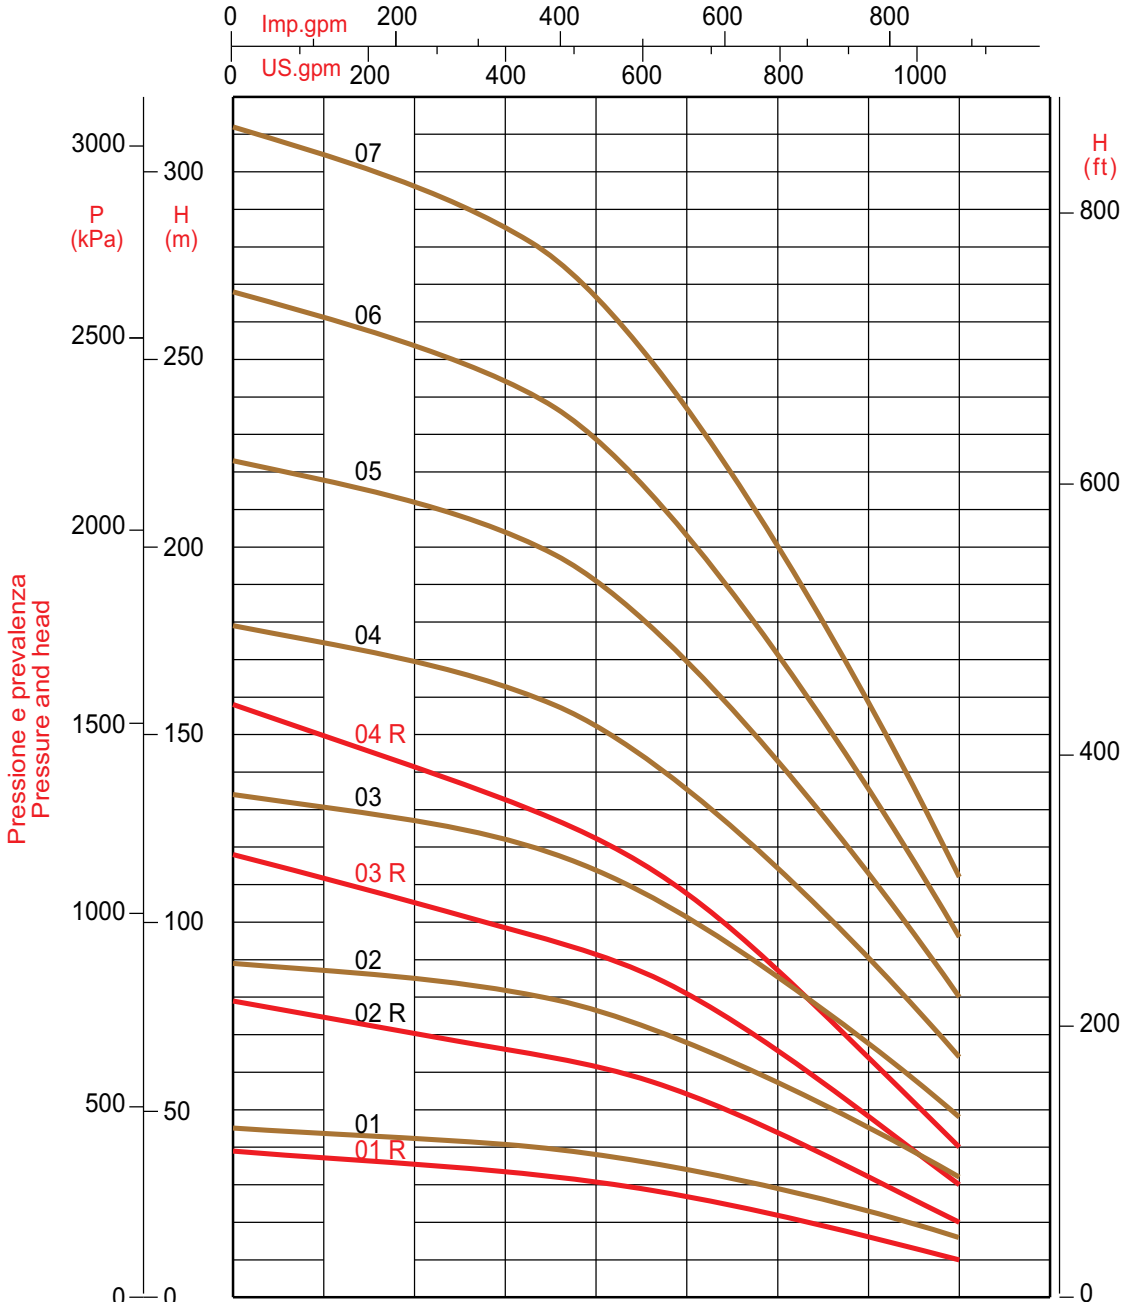

2 poli/50Hz

2 poles/50Hz

TIPO - TYPE	DATI FUNZIONAMENTO MOTORE MOTOR OPERATING DATA				DATI IDRAULICI - HYDRAULIC DATA												
	POTENZA POWER		CORRENTE CURRENT		PORTATA CAPACITY												
TRIFASE THREE - PHASE 400 V 50 Hz	HP	kW	A 3x230 V	A 3x400 V	Q(l/min)	0	1600	1900	2200	2500	2800	3000	3200	3400	3600	3800	4000
					Q(m³/h)	0	96	114	132	150	168	180	192	204	216	228	240
					H=prevalenza totale in m.c.a.						H=total head w.c.m.						
S1270-01R 200	20	15	60	34	39	33	31	29	27	24	22	19	17	15	13	10	
S1270-01 250	25	18.5	73	39	45	40	39	37	34	31	29	26	24	22	20	16	
S1270-02R 400	40	30	109	63	79	66	63	59	54	48	43	38	34	29	25	20	
S1270-02 500	50	37	133	78	89	81	80	73	67	62	57	53	48	43	37	32	
S1270-03R 600	60	45	161	92	118	98	92	88	80	72	65	58	52	44	36	30	
S1270-03 750	75	55	192	109	134	121	116	110	102	93	85	80	73	64	56	48	
S1270-04R 800	80	59	213	123	158	131	125	117	107	96	87	77	69	59	50	40	
S1270-04 1000	100	75	264	153	179	161	155	146	135	123	113	105	95	85	75	64	
S1270-05 1250	125	93		191	223	201	194	183	170	153	142	131	120	107	93	80	
S1270-06 1500	150	110		232	268	242	232	220	203	184	170	157	143	128	112	96	
S1270-07 1750	175	130		256	312	282	271	256	238	215	199	183	167	149	132	112	

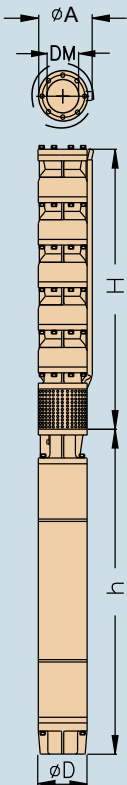

Dimensioni e pesi

Dimensions and weights

TIPO - TYPE	N. STADI STAGES	POMPA PUMP		MOTORE MOTOR		DM	A	D
		H	kg	h	kg			
S1270-01R 200	1	800	80	776.2	56.7	G 6	265	144
S1270-01 250	1	800	80	841.5	63.3			
S1270-02R 400	2	975	99	1036.6	83.9			
S1270-02 500	2	975	99	1404.9	135			
S1270-03R 600	3	1150	118	1557.3	148			191
S1270-03 750	3	1150	118	1340	176			
S1270-04R 800	4	1322	137	1340	176			
S1270-04 1000	4	1322	137	1560	215			232
S1270-05 1250	5	1497	156	1740	247			
S1270-06 1500	6	1672	175	1529	315			
S1270-07 1750	7	1847	194	1659	360			